

- Use the **2-way navi-key** to scroll to each field and enter the Roadpost information, including the Roadpost Customer Service Number: **+19052725665**. Press the **left** soft key labeled **Save**.
- Follow the same steps to enter your voicemail number: **+881662990000**.

Please **refer to Section 6 of your Iridium 9555 User Guide** for more detailed instructions on storing names and numbers.

5) Making a Call

- Before you can place a call, the phone must be powered **ON** and SIM card must be inserted.
- You must have a clear direct view of the sky in order to be in contact with the network. The antenna should be extended and pointed up towards the sky.
- Enter the phone number you wish to dial using the key pad. The phone number must be entered in international format: 00 or + [country code] [phone number]. (The "+" sign is obtained by pressing and holding "0").
- Press the green key to dial.

Please **refer to Section 4 of your Iridium 9555 User Guide** for more information on getting started and making a call.

For additional information on the features and functionality of your Iridium 9555 satellite phone please refer to your Iridium Quickstart and User Guide. Thanks again for choosing Roadpost.

Roadpost Technical Support

A free call from your Roadpost satellite phone:

+1.905.272.5665

A free call from North America:

+1.888.622.7368

www.roadpost.com/contact_us.aspx

www.roadpost.com



READ THIS FIRST BEFORE MAKING CALLS!


Thank you for choosing Roadpost. Our Welcome Kit gives you the information, tools and tips you need to make your global communication experience a positive one. Below are important steps that you need to take for proper set up of your phone.

If at any time you have questions about how our service works please call our Customer Care team at **1.888.290.1616** or contact us via www.roadpost.com/contact_us.aspx. For detailed information on any of the steps below, please refer to your Iridium® 9555 User Guide.

1) Install your SIM card

To make and/or receive calls with your Iridium satellite phone, a Subscriber Identity Module (SIM) card is required. The SIM card also acts as your phone's memory, maintaining saved contact names and numbers. To insert your SIM card:

- Make sure your phone is fully charged and powered OFF.
- Remove the battery from the phone.
- Slide the SIM card into the SIM card slot. Follow the card orientation shown on the decal. Be sure the gold contact is facing down. The card is held in place by a small retaining clip.
- Replace the battery.

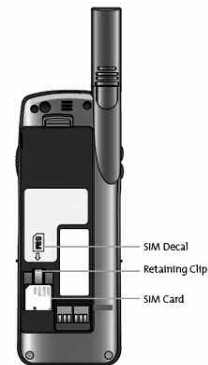

Please **refer to Section 4.2 of your Iridium 9555 User Guide** for more detailed instructions on SIM card installation.

2) Deactivate your PIN

Your SIM card is protected by a 4 digit PIN code that is requested each time you power on your phone. **The default PIN code is 1111.** To disable the PIN:

1. Power the phone on by pressing and holding the **On/Off** button for 5 seconds.
2. Enter the **4 digit PIN 1111**. Press **OK**.
3. Starting from the home screen, press the **Menu** key, use the **2-way navi-key** to scroll to **Security** and press the **left** soft key labeled **Select**. Scroll until **SIM Lock** is highlighted. Press the **left** soft key labeled **Select**.
4. Use the **2-way navi-key** to scroll until **Disable SIM lock** is highlighted. Press the **left** soft key labeled **Select**.
5. Enter the **default PIN 1111** in the **Phone PIN** field. Press the **left** soft key labeled **Select**.
6. The screen will briefly display **SIM lock disabled** and then return to the **SIM lock** menu.

Please **refer to Section 12 of your Iridium 9555 User Guide** for more detailed instructions on activating, changing, and deactivating your PIN.

3) Setting up Voicemail and Iridium Service Centre Numbers

If you have voicemail service, you must first program the voicemail access number into your phone:

1. Starting from the home screen, press the **Menu** key, use the **2-way navi-key** to scroll until **Voicemail** is highlighted. Press the **left** soft key labeled **Select**.
2. Use the **2-way navi-key** to scroll until **Voicemail Settings** is highlighted. Press the **left** soft key labeled **Select**.
3. The **Number** option will be highlighted. Press the **left** soft key labeled **Select**.
4. Enter the voicemail number **+881662990000** (The “+” sign is obtained by pressing and holding “0”).
5. Press the **left** soft key, labeled **Save**.

6. Press the **right** soft key, labeled **Back** to return to the previous menu.
7. Press the **red** key to exit to the home screen.

Text Messaging

It is also a good idea to program the Iridium Service Centre number on your SIM card, as this enables your text messaging capability. To do this:

1. Starting from the home screen, press the **Menu** key, use the **2-way navi-key** to scroll until **Messages** is highlighted. Press the **left** soft key labeled **Select**.
2. Use the **2-way navi-key** to scroll until **Settings** is highlighted. Press the **left** soft key labeled **Select**.
3. The **Service Center** option should be highlighted, if not, scroll using the **2-way navi-key** until it is highlighted. Press the **left** soft key labeled **Select**.
4. Enter the Service Centre Number **+881662900005**. Press the **left** soft key labeled **OK**.
5. Press the **red** key to exit to the home screen.

4) Storing Names and Numbers

You can store important numbers including voicemail and Roadpost Customer Care into your phonebook for quick and easy access:

1. Starting from the home screen, press the **Menu** key, use the **2-way navi-key** to scroll until **My Phonebook** is highlighted. Press the **left** soft key labeled **Select**.
2. The **Phonebook** will now be displayed. Press the **left** soft key labeled **Options**.
3. Use the **2-way navi-key** to scroll until the **New** option is highlighted. Press the **left** soft key labeled **Select**.
4. **New Entry** should be highlighted, press the **left** soft key labeled **Select**.
5. The **New Entry** screen will now be displayed with a list of icons which represent **Name**, **Home phone**, **Work phone**, **1st Cell phone**, **2nd Cell phone**, and **email address**.